

# NTL0474 / NTL0476

## HORN; INDUSTRIAL STRENGTH

### NTL0474




### FEATURES

- Metal
- 30 Watt multi-tap
- Indoor / Outdoor

SWITCH SETTINGS	POS	25V	70V	OHMS
	1	NOT USED	2	2500
	2	NOT USED	4	1300
	3	NOT USED	7.5	666
	4	2	15	333
	5	4	30	167
	6	7	NOT USED	89
	7	15	NOT USED	45

POWER (AVERAGE / MAXIMUM)	30 / 40 W
IMPEDANCE	2500 -1300 -666 -333 -167- 89 - 45 Ohm
FREQUENCY RESPONSE	250 ~ 12000 Hz
SPL	108
DIMENSION (LxW)	242 x 265 mm
WEIGHT	2.4 Kg

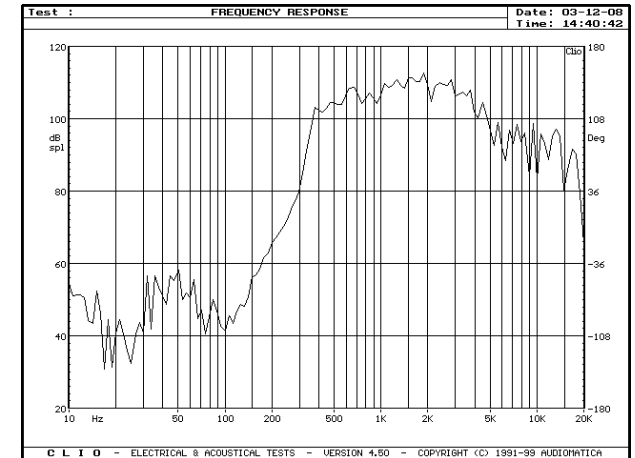

FREQUENCY RESPONSE

### NTL0476




### FEATURES

- Metal
- 15 Watt multi-tap
- Indoor / Outdoor

SWITCH SETTINGS	POS	25V	70V	OHMS
	1	NOT USED	1	5000
	2	NOT USED	2	2500
	3	0.5	4	1300
	4	1	7.5	666
	5	2	1.5	333
	6	1.5	NOT USED	89
	7	1.5	NOT USED	45

POWER (AVERAGE / MAXIMUM)	15 / 20 W
IMPEDANCE	5000 -2500 -1300 - 666 -333 - 89 - 45 Ohm
FREQUENCY RESPONSE	280~12000 Hz
SPL	108
DIMENSION (LxW)	223x230 mm
WEIGHT	1.6 Kg

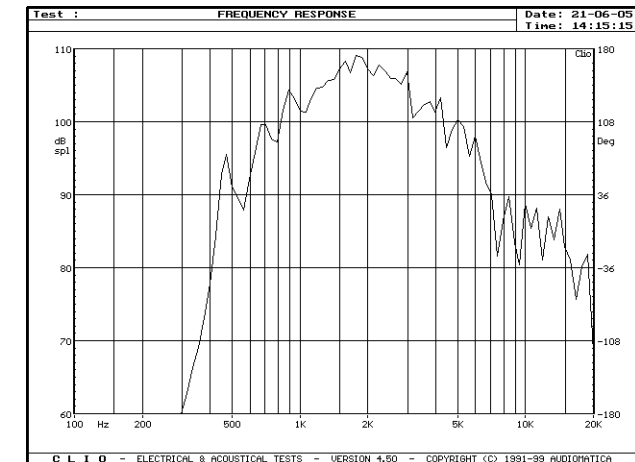

FREQUENCY RESPONSE